

MODEL N° 60057 OWNER'S MANUAL

Keep this Identification Number in case you must contact our Customer Service Department.

IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY

Dear Valued Customer,

We would like to congratulate you on your purchase of a Lifetime© Outdoor Storage Shed! We are confident that you have made the perfect choice and you will be very pleased with your new storage solution.

Lifetime© Outdoor Storage is part of the family of products created and manufactured by Lifetime® Products, Inc. Like all of our products, you can be assured that the quality of your Lifetime Outdoor Storage Shed is the best in the world! And, we back that quality up by offering the best warranty in the business – A 10-year warranty that fully covers the Shed!

All of our Sheds are built with the highest-quality steel and high-density polyethylene (HDPE) parts. The design and construction of our steel-reinforced double-Wall Panels is second to none. All of our exposed steel parts and gables are powder coated and we use high-density polyethylene plastic. What makes polyethylene so special? It has superior strength and durability, and, it won't crack or degrade outdoors.

So now that you know the quality you are getting in a Lifetime Outdoor Storage Shed, please take the time to READ THIS INSTRUCTION MANUAL!

We have taken great care in providing the best possible form of instructions to help you put your new Outdoor Storage Shed together. Before you get started, PLEASE read the following preparation tips to help you get started!

We can assure you, your construction experience will be a lot more enjoyable if you do!

PREPARATION TIPS:

- The first step is simple... RELAX! You have made a great purchase, but Rome was not built in a day. Plan to spend a good part of your weekend putting together your fine Outdoor Storage Shed. Our philosophy is, if it comes together quickly and easily, it surely will come apart quickly and easily! Your Lifetime© Outdoor Storage Shed will surely last a long, long time, if you are patient, and take all the time necessary to put it together as we have instructed.
- Grab a friend to join in on the fun! This is not a one-person endeavor. We have found that not only will things go smoother if you have two or more people participating in the construction of the Shed, but it will go quicker as well. So, the more the merrier!
- Make sure you have all the tools necessary for constructing your new Shed. There is a "Tools Required For This Assembly" list on page five of this Owner's Manual.
- The plastic pieces of your Shed may become damaged by over tightening the screws. To avoid this damage, we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low-torque setting. If neither is available, use a hand screwdriver. If a hand screwdriver is all you have, take several breaks... your wrist will need it!
- You will also need two small ladders (when it comes time to do the roof!).

IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY

- Before beginning assembly, remove the Parts List from the center of this Owner's Manual and take an inventory of the parts included with your Outdoor Storage Shed. Also, read through the entire instruction manual. It's always a great practice to get a feel for the flow of the process and to familiarize yourself with the parts involved. But, try not to get ahead of yourself and start the process out of order.
- FOLLOW THE INSTRUCTIONS IN ORDER! Everything goes together in a certain order, and we have learned what that correct order should be. In our state-of-the-art research and testing facility, we have painstakingly created these instructions. The order of construction is there for a reason, and some parts simply will not fit if built out of order. Just follow along with the order in the instructions and everything will fit together and things will go very smooth.
- YOUR SHED MUST BE BUILT ON A LEVEL SURFACE! If the spot you have chosen to place your wonderful new Outdoor Storage Shed is not level, the Shed will not assemble correctly! We recommend a concrete patio, a wood platform or creating a pad with pea gravel. Your Shed is meant to last a lifetime, so provide the proper foundation for it before you start to build.
- Before you build it, make sure you are allowed to build it! Consult all building codes, as well as city and county ordinances, to ensure that you do not require a building permit to construct your Outdoor Storage Shed. Proper building permit documentation may be required in your neighborhood, and it would be quite unfortunate to learn this after your Outdoor Storage Shed is already built!

Now that you're ready to begin the construction of your wonderful new Outdoor Storage Shed, step back, take a deep breath, get yourself a large cold beverage and enjoy yourself. We guarantee that after spending the right amount of time in building your Shed, you will be able to enjoy it for years to come.

Thanks for choosing Lifetime©, and have fun!

ABOUT LIFETIME PRODUCTS, INC.

Lifetime Products, Inc., has applied innovation and cutting-edge technology in plastics and metals to create a family of affordable lifestyle products that feature superior strength and durability. The world's leading manufacturer of folding tables and chairs, Lifetime was founded in 1986 as the maker of portable basketball systems that revolutionized the industry with patented technology. With diverse offerings such as outdoor storage sheds and steel utility trailers, Lifetime continues to develop innovative products that outfit the way you live.

Lifetime makes the things you need for the lifestyle you want. By innovating products in and around the home, Lifetime simplifies your everyday life and enables you to get the most out of your free time.



REGISTER YOUR LIFETIME PRODUCT TODAY!

There are benefits to registering your Lifetime product. With our new online product registration form, it's fast and easy! Register with us at www.lifetime.com and enjoy these great benefits:

- Receive exclusive money-saving offers from BuyLifetime.com, our online store, as well as NEW product notifications and special closeout promotions!
- In the unlikely event of a product recall or safety modification, we will notify you.
- Registering your product guarantees you warranty service. If you do not register your product, your warranty rights will not be diminished. But you will need to provide a sales receipt to verify your product purchase date before warranty service will be provided.

LIFETIME'S PROMISE TO YOU:

Maintaining your privacy is our long-standing policy at Lifetime. And you can rest assured that Lifetime will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.

We invite you to read our privacy policy at www.lifetime.com

REGISTER today!

U.S. and Canada customers ONLY

IF ASSISTANCE IS NEEDED,

DO NOT CONTACT THE STORE!

CALL OUR CUSTOMER SERVICE DEPARTMENT at 1 (800) 225-3865

HOURS: 7:00 a.m. to 5:00 p.m. Monday through Friday (Mountain Standard Time) **Call, or visit our Web site for Saturday hours**

For customers outside the U.S. or Canada, please contact the store for assistance.



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. <u>Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document.</u> Proper and complete assembly, use and supervision are essential to reduce the risk of accident or injury.

- Do not use or store hot objects such as grills, blowtorches, welding equipment, etc. near the product.
- If using a ladder during assembly, use extreme caution.
- Two capable adults are required for assembly. (It is also recommended that a third adult function as an instruction reader.)

Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.


BEFORE BEGINNING ASSEMBLY



Keep the hardware bags and their contents separate. If any parts are missing, call our Customer Service Department.




Read the "Congratulations" letter on page 2-3. Identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document.



Two adults required to complete assembly

(+ one adult suggested as an instruction reader)

Only adults should set up the product. Do not allow children in the set-up area until assembly is complete.

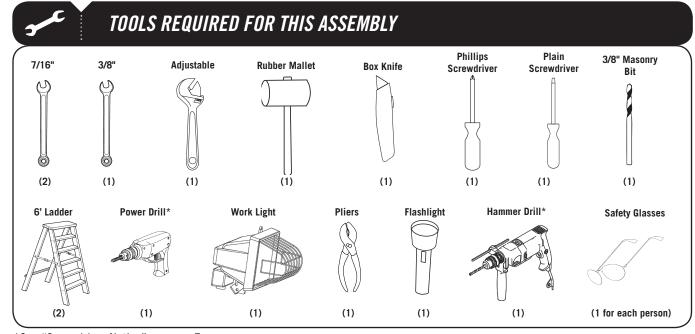

*See "Screwdriver Notice" on page 7.


ASSEMBLY GUIDES

Refer to the following areas throughout the instructions to assist in the assembly process:

This area is located at the top, left-hand corner of the page and indicates which tools and hardware are needed to complete the assembly steps on a page.



This area is located at the top, right-hand corner of the page and shows an image of the product with shaded parts indicating which section is being assembled.



This area is usually located in the bottom, left-hand corner of a step and indicates that special attention is needed to perform a particular part of a step.



These areas are usually located in the bottom, right-hand corner of a step and indicate that damage to the product or serious injury may occur if the caution or warning is not heeded.





Throughout the Parts & Hardware List, Part & Hardware Identifiers, and instructions are three-letter IDs. These IDs are below the images of the parts and hardware to help you locate and identify the parts and hardware during assembly. These IDs are not necessarily on the parts themselves.



ADZ (x10) 1/4" x 5/8" Pan-Head Screw

IMPORTANT NOTICES

Level Surface Notice:

Surface must be leveled before installation. We recommend building a level work space with a concrete or patio style surface. If the surface is not properly leveled, the Outdoor Shed will not assemble correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.

Building Code Notice:

Consult all local building codes, as well as city and county ordinances, to ensure that the construction of the Outdoor Shed does not require a building permit. Proper building permit documentation may be required in your neighborhood, and it would be unfortunate to learn this after constructing the Shed.

Screwdriver Notice:

You may use a #2 Phillips head screwdriver bit and a power screwdriver or drill, instead of a hand screwdriver. However, be aware that the plastic pieces of your Shed can be damaged by overtightening of screws. To avoid damage we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low torque setting. If neither is available, use a hand screwdriver. In any case use caution to avoid overtightening the screws.

Floor Puncture Notice:


Sharp objects may damage your floor. If resting sharp, heavy objects on your Shed floor, place a block of wood between the sharp object and floor.


CAUTION:

If more than six (6) inches of snow accumulate on the roof of the shed, carefully remove the snow to avoid possible roof collapse. While standing on the ground, remove the snow from the roof with a broom or snow shovel. Do not stand on the roof to remove snow.

PARTS & HARDWARE LIST

BOX 1				
SHED PARTS BOX				
ID Description	Qty	ID	Description	Qty
AHD Wall Panel	4		T DOOR ASSEMBLY HARDWARE	aty
AGL Corner Wall Panel	4	BYS	Outer Door Handle	1
BYV Skylight	1	BYR	Inner Door Handle	1
CNW 60057 METAL KIT		BYZ	#10 x 1 3/4" Pan-Head Screw	2 5
AFG Truss Brace	1	ADW	#10 x 3/4" Pan-Head Screw	
AFH Truss Gutter Channel	2	AEE	#10 x 1/2 Flat Washer	7
AFM Wall Support Channel	4	BZB	#10 x 1/4" Nylon Spacer	4
BXX Rear Wall Support Square Tu	be 1	CHK	#10 x 3/4" Self-Drilling/Self-Tapping Screw	1
AFE Entry Header Bar	1	BBH	End Cap	1
BYA Left Angled Door Jamb	1	BYP	Deadbolt Latch Bracket	2
BYB Right Angled Door Jamb	1	BYQ	Deadbolt Latch	2
CHH Door Hinge Tube	2	ARA	1/8" Drill Bit	1
CHI Door Square Tube	2		HT DOOR ASSEMBLY HARDWARE	-
CVX 60057 SMALL PARTS BOX		BYS	Outer Door Handle	1
BYW Roof End Cap	2	BYR	Inner Door Handle	1
BYX Roof End Cap Filter	4	BYZ	#10 x 1 3/4" Pan-Head Screw	2 1
BYY Roof Support Tube	4	ADW AEE	#10 x 3/4" Pan-Head Screw #10 Flat Washer	1
AIX Wood Shim	4	BBI	Inside Door Handle	1
AIW Wood Block	1	CHK	#10 x 3/4" Self-Drilling/Self-Tapping Screw	1
AFZ Corner Shelf	2	BBH	End Cap	1
BYC FLOOR ASSEMBLY HARDWARE	4		ISS, REAR GABLE, & ROOF INSTALLATION HARDWARE	_
BQC #8 x 1/2" Pan-Head Screw AHO Door Hinge Bushing	4 2	ADZ	1/4" x 5/8" Pan-Head Screw	64
AHO Door Hinge Bushing ADC #2 Phillips Bit	1	BYT	Gable-to-Roof Clip	16
CNU WALL INSTALLATION HARDWARE	1	ADV	1/4" x 1 1/8" Pan-Head Screw	16
ADZ 1/4" x 5/8" Pan-Head Screw	55	SHELF IN	ISTALLATION HARDWARE	
ADV 1/4" x 1 1/8" Pan-Head Screen		BHI Cor	ner Shelf Installation Hardware (x2)	
BYD TRUSS ASSEMBLY HARDWARE		ADZ	1/4" x 5/8" Pan-Head Screw	4
ADY #10 x 3/8" Pan-Head Screw	12		" Shelf Installation Hardware	
ADK #10 Cap Nut	12	ADZ	1/4" x 5/8" Pan-Head Screw	14
ADJ 1/4" Cap Nut	2	AIY	Shelf Support Bracket	2
BXU Truss Connector A	1	CVP LATCH INSTALLATION HARDWARE		
BXV Truss Connector B	1	ACA	1/4" x 1/2" Carriage Bolt	3
BXW Truss Connector Bracket	1	AEB	1/4" Flat Washer	3
ADH 1/4" Threaded Rod	1	ADX	#10 x 1/2" Pan-Head Screw	9
BYF GABLE ASSEMBLY HARDWARE		AEE	#10 Flat Washer	9
ADZ 1/4" x 5/8" Pan-Head Screw	3	AAB CHK	1/4" Centerlock Nut #10 x 3/4" Self-Drilling/Self Tapping Screw	
ADV 1/4" x 1 1/8" Pan-Head Scre		CVW	Door Latch	2 1
BYI DOOR & ENTRY GABLE INSTALLATION HAR		CVV	Left Door Latch Bracket	1
ADZ 1/4" x 5/8" Pan-Head Screw		CVU	Large Right Door Latch Bracket	1
AHP Cotter Pin	2 5	CVV	Small Right Door Latch Bracket	1
BFY 1/4" x 3/4" Pan-Head Screw	5	CVS	Left Door Latch Cover	1
ADJ 1/4" Cap Nut BXZ 1/4" Nylon Washer	16	CVR	Small Right Door Latch Cover	1
ADX #10 x 1/2" Pan-Head Screw	2	CVQ	Large Right Door Latch Cover	1
BYM Strike Plate	1	BOX 2		
DTW Stilke Flate	1	SHED PARTS BOX		
				0
		AGR	Outer Floor Panel	2
		AGQ	Roof Panel	4
		AGZ AGO	Right Door Left Door	1 1
		AGC	Entry Gable	1
		AGH	Rear Gable 1	1
		AGI	Rear Gable 2	1
		AFS	10" x 30" Shelf	1
		, (1)	10 A OO OHOH	1

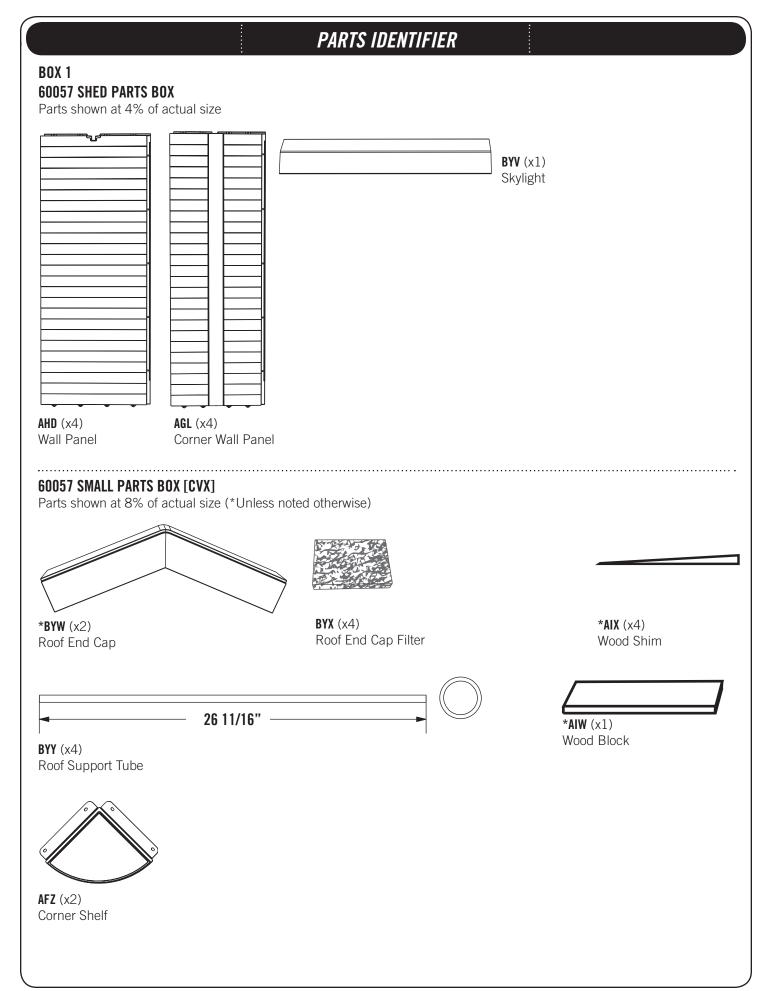

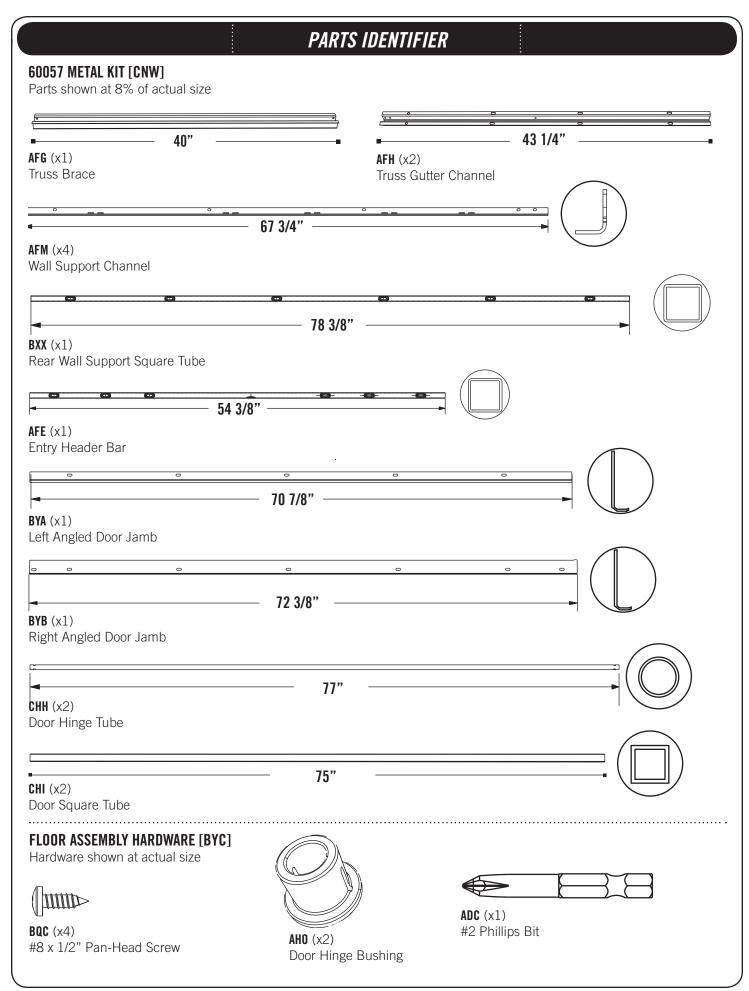

PARTS IDENTIFIER

WALL INSTALLATION HARDWARE [CNU]

Hardware shown at actual size





ADZ (x55)

1/4" x 5/8" Pan-Head Screw

ADV (x6) 1/4" x 1 1/8" Pan-Head Screw

TRUSS ASSEMBLY HARDWARE [BYD]

Hardware shown at actual size








ADY (x12)

#10 x 3/8" Pan-Head Screw #10 Cap Nut

ADJ(x2)

1/4" Cap Nut

Parts shown at 50% of actual size







BXU(x1)

Truss Connector A

BXV(x1)


.....

Truss Connector B

BXW (x1)

Truss Connector Bracket

Part shown at 25% of actual size



ADH (x1)

1/4" Threaded Rod

SHELF INSTALLATION HARDWARE

Hardware shown at actual size (*Unless noted otherwise)

Corner Shelf Installation Hardware [BHI] x2

: 30" Shelf Installation Hardware [BHH]







1/4" x 5/8" Pan-Head Screw



ADZ (x14)

1/4" x 5/8" Pan-Head Screw

.....

: (Only 4 used)



*AIY (x2)

10" Shelf Bracket

GABLE ASSEMBLY HARDWARE [BYF]

Hardware shown at actual size





1/4" x 5/8" Pan-Head Screw

ADV (x6)

1/4" x 1 1/8" Pan-Head Screw

PARTS IDENTIFIER

DOOR & ENTRY GABLE INSTALLATION HARDWARE [BYI]

Hardware shown at actual size







1/4" x 5/8" Pan-Head Screw

AHP (x2) Cotter Pin

.....

BFY (x5) 1/4" x 3/4" Pan-Head Screw

1/4" Cap Nut



BXZ (x16)

1/4" Nylon Washer



ADX(x2)

#10 x 1/2" Pan-Head Screw

Part shown at 25% of actual size



BYM (x1)

Strike Plate


RIGHT DOOR ASSEMBLY HARDWARE [BYK]

Hardware shown at actual size



ADW (x1)

#10 x 3/4" Pan-Head Screw



BYZ (x2)

#10 x 1 3/4" Pan-Head Screw



AEE (x1)

#10 Flat Washer

CHK(x1)

#10 x 3/4" Self-Drilling/Self-Tapping

Part shown at 50% of actual size



BBI (x1)

Inside Door Handle



BBH (x1)

1" Square End Cap

Part shown at 25% of actual size



BYR (x1)

Inner Handle



BYS (x1)

Outer Handle


PARTS & HARDWARE IDENTIFIER

LEFT DOOR ASSEMBLY HARDWARE [BYJ]


Hardware shown at actual size



#10 x 3/4" Pan-Head Screw



#10 x 1 3/4" Pan-Head Screw




CHK(x1)#10 x 3/4" Self-Drilling/Self-Tapping Screw




#10 Flat Washer



BZB (x4) #10 x 1/4" Nylon Spacer



BBH (x1) 1" Square End Cap



ARA(x1)1/8" Drill Bit

Part shown at 25% of actual size



BYQ (x2) Deadbolt Latch



Deadbolt Latch Bracket



Outer Door Handle



BYR (x1) Inner Door Handle

TRUSS, REAR GABLE, & ROOF INSTALLATION HARDWARE [CNV]

Hardware shown at actual size



ADZ (x64) 1/4" x 5/8" Pan-Head Screw (Not all screws will be used)



Gable-to-Roof Clip



ADV (x16) 1/4" x 1 1/8" Pan-Head Screw

PARTS & HARDWARE IDENTIFIER

LATCH INSTALLATION HARDWARE [CVP]

Hardware shown at actual size



ACA (x3)

1/4" x 1/2" Carriage Bolt



AEB (x3)

1/4" Flat Washer



ADX (x9)

#10 x 1/2" Pan-Head Screw



AAB (x3)

1/4" Centerlock Nut



CHK (x2)

#10 x 3/4" Self-Drilling/Self Tapping Screw




AEE (x9

.....

#10 Flat Washer

Hardware shown at same scale



CVW (x1) Door Latch



CVT (x1)

Left Door Latch Bracket




CVU (x1)

Large Right Door Latch Bracket



CVV (x1)

Small Right Door Latch Bracket




CVS (x1)

Left Door Latch Cover



CVR (x1)

Small Right Door Latch Cover



CVQ (x1)


Large Right Door Latch Cover

PARTS IDENTIFIER

BOX 2


60057 SHED PARTS BOX

Parts shown at 4% of actual size




AGR (x2)

Outer Floor Panel




AGQ (x4)

Roof Panel



AGO (x1) Left Door



AGZ (x1)

Right Door



AGF (x1)

Entry Gable



AGH(x1)

Rear Gable 1



AGI(x1)

Rear Gable 2

Part shown at 8% of actual size



100201


AFS (x1) 10" x 30" Shelf

3 C

TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



Concrete (1 cu. yd.)




SEC

1.1

SITE PREPARATION - CONCRETE PLATFORM PREPARATION


The actual dimensions of your shed (at its widest and deepest points) are 7' \times 4' 8". Ensure you select a site that will accommodate these measurements. The base of the shed is slightly smaller than this, so you will need to create a level surface that is at least 81 1/2" Wide \times 55 1/4" Deep. We recommend using a level cement or patio style surface. This will provide the best long-term performance for your shed.

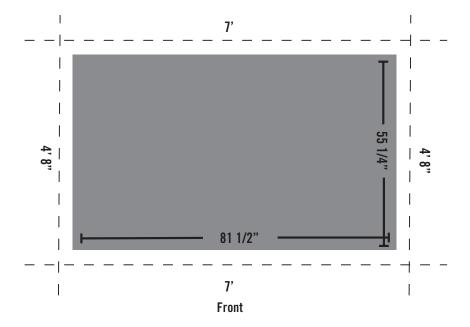

I

Note: Surface must be leveled before installation. If the surface is not properly leveled, the shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.

Note: Any platform or similar structure should be built above ground in order to avoid water pooling inside the shed.

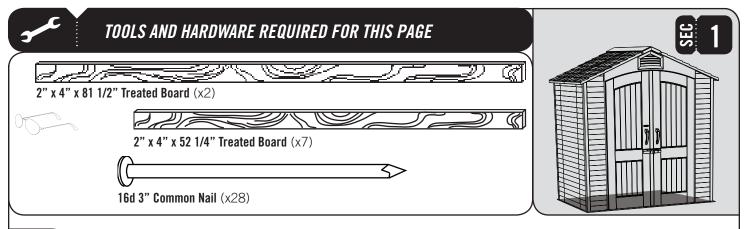


SEC 1.2

ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY

Ensure you use lumber that is treated and approved for outdoor use. **Build outside frame to 81 1/2" Wide x 55 1/4" Deep.**

Note: Whenever possible you should use the surfaces described on Page 7. When this is not possible, we recommend you use a wood platform or a filled wood frame.

Note: All lumber must be rated for outdoor use.

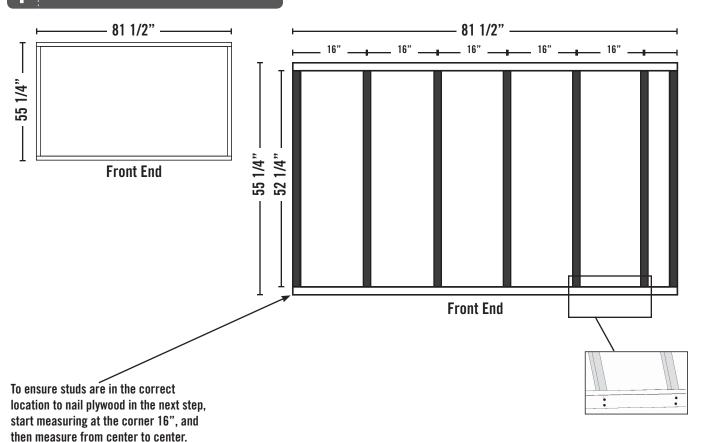

Place the 2" x 4" x 52 1/4" boards on the inside of the frame. Nail each board in place with the 16d nails.

Н

Note: Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.





8d 1 1/2" Common Nail (x36)



48" x 55 1/4" x 3/4"


33 1/2" x 55 1/4" x 3/4"

SEC 1.3

ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY (CONT.)

Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B.


Note: All lumber must be rated for outdoor use.

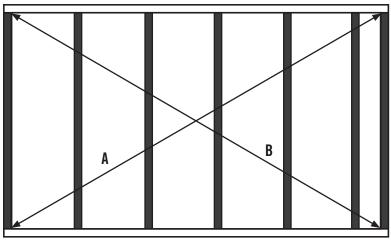


Front End

SEC 1.4

Cut Plywood into sizes called for above. Arrange the Plywood according to the diagram and nail into place with 8d x 1 1/2" nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt until platform is stable. Drill three evenly spaced 1/2" drain holes in plywood between each 2" x 4".

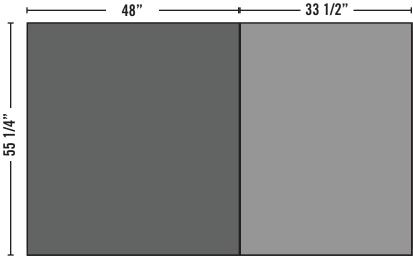

Front End

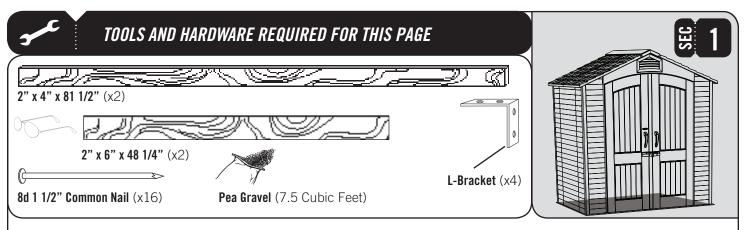


SEC 1.5


ALTERNATIVE SITE PREPARATION: OPTION 2 - FILLED WOOD FRAME ASSEMBLY

Cut outside frame to $81\ 1/2$ ' Wide x $55\ 1/4$ " Long outside dimensions. Lay boards flat so widest part faces up. Ensure frame is level. Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B. Nail an L-Bracket on each corner of the frame with $8d \times 1\ 1/2$ " Common Nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt or "Pea Gravel", until platform is stable.

Note: Whenever possible you should use the surfaces described on Page 7.

Note: All lumber must be rated for outdoor use.







SEC 1.6

Once all boards are level and do not wobble, pack "Pea Gravel" around the outside of the frame, and slope away from frame.

SEC 1.7

Now fill the inside of the frame with "Pea Gravel". Use a leveling board to scrape off extra fill material and to level the surface.







2" x 4" x 7' Leveling Board $(\times 1)$

원 2 FLOOR ASSEMBLY

HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BYC

Hardware shown at actual size



BQC (x4)

#8 x 1/2" Pan-Head Screw




AHO (x2) Door Hinge Bushing



ADC (x1) #2 Phillips Bit

PLASTIC PARTS REQUIRED


Parts shown at 4% of actual size



AGR(x2)Outer Floor Panel

TOOLS REQUIRED

HARDWARE BAG REQUIRED: BYC







Phillips Screwdriver


Safety Glasses

ADC (x1) #2 Phillips Bit











SEC 2.1

FLOOR ASSEMBLY

Lay an **Outer Floor Panel (AGR)** flat on the ground. Hold the second **Outer Floor Panel (AGR)** at an angle as shown and fit the tabs on one Panel into the slots of the other. Lay the Outer Floor Panel flat.

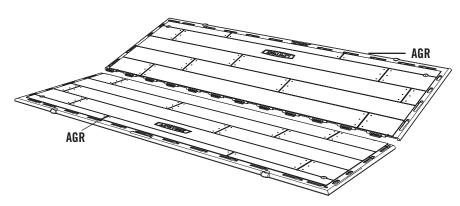





CAUTION

Sharp objects may damage your floor. If resting sharp, heavy objects on your shed floor, place a block of wood between the sharp object and floor.

SEC 2.2


Decide which end will be the front of your shed. Lift the front Outer Floor Panel up enough to slide two **Door Hinge Bushings (AHO)** under and up through the holes in the front Outer Floor Panel as shown.

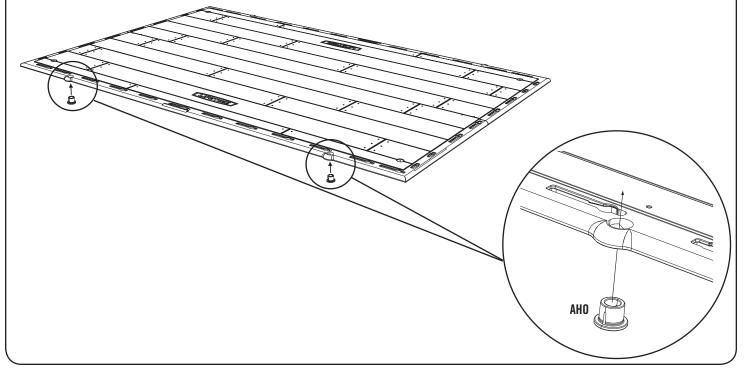

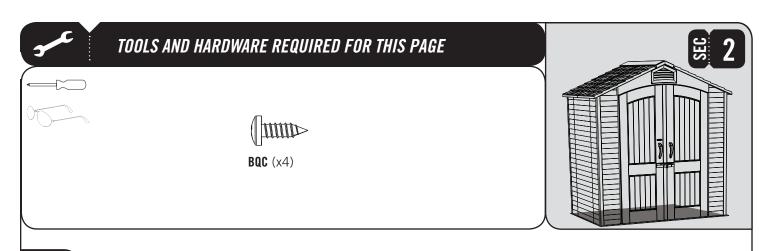

SEC 2.3

Face the seam of the two adjacent Floor Panels. Insert one (1) #8 x 1/2" Pan-Head Screw (BQC) into each divot near the ends of the seam of the Outer Floor Panels and down into the tab of the adjacent Outer Floor Panel at the locations indicated. Do not overtighten.

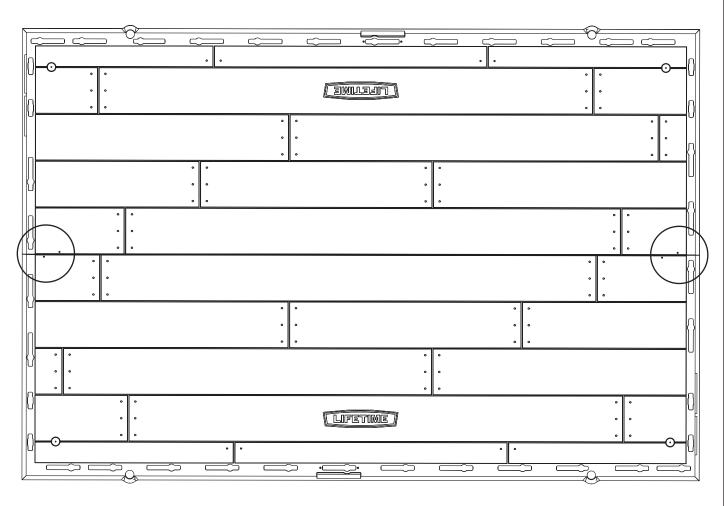






IF YOU PLAN ON ANCHORING YOUR SHED, CHECK WITH YOUR LOCAL HARDWARE STORE FOR SUITABLE HARDWARE.



SEC 2.4

ANCHORING THE SHED

If you plan on anchoring the shed, anchor it to your platform through the four indentations near the corners of the floor. The anchoring hardware used depends on the platform. If you have a concrete platform, we recommend using four (4) 3/8" Anchor Bolts and four (4) 3/8" x 1" Fender Washers. If you have a wood framed platform, we recommend using four (4) 3/8" Lag Bolts and four (4) 3/8" x 1" Fender Washers. **Do not exceed a 3/8" diameter bolt. Refer to your local hardware store for this hardware.**

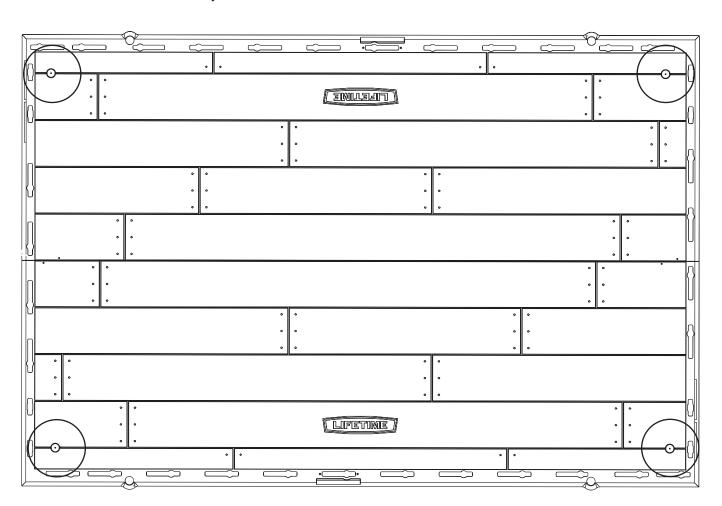

WARNING

Failure to anchor the shed may result in property damage and/or personal injury.



B 3 TRUSS ASSEMBLY

HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BYD

Hardware shown at actual size



ADY (x12) #10 x 3/8" Screw




#10 Cap Nut



1/4" Cap Nut

Part shown at 50% of actual size



BXU (x1) Truss Connector A



BXV (x1)



Truss Connector B




BXW (x1)

Truss Connector Bracket

Part shown at 25% of actual size

METAL PARTS REQUIRED




ADH(x1)

1/4" Threaded Rod

METAL PARTS KIT REQUIRED: CNW

Parts shown at 8% of actual size (*Unless indicated otherwise)



AFH (x2)

Truss Gutter Channel



AFG(x1)

Truss Brace

TOOLS REQUIRED









Phillips Screwdriver

7/16" Wrench

3/8" Wrench

Safety Glasses




ADY (x4)



SEC 3.1


TRUSS ASSEMBLY


Insert four (4) #10 x 3/8" Pan-Head Screws (ADY) through a Truss Connector A (BXU) as shown.

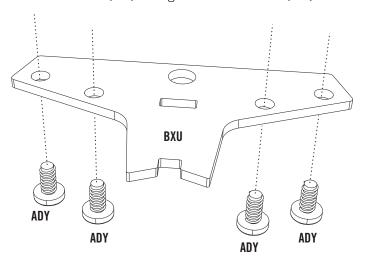

SEC 3.2

Place two (2) **Truss Gutter Channels (AFH)** over the Truss Connector as shown and insert the four Screws through the four holes in the Truss Gutter Channels. Lightly secure the Screws with four (4) **#10 Cap Nuts (ADK)**. **Hand tighten only in this step.**

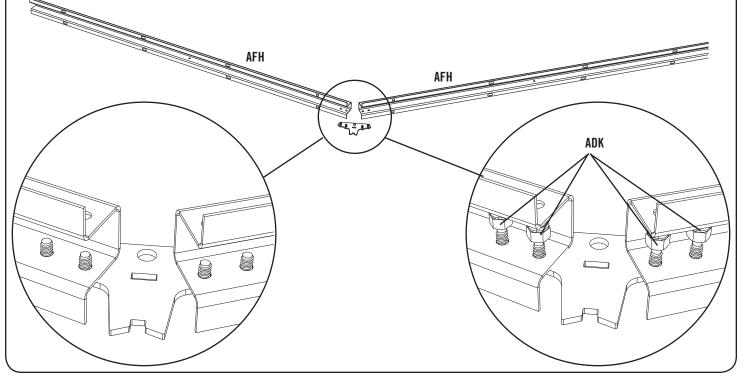


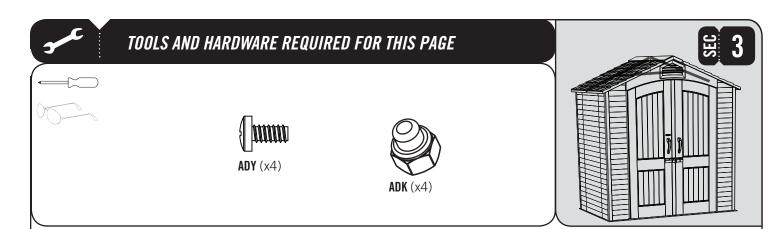

SEC


3.3


Insert a **Truss Connector Bracket (BXW)** into the slot in Truss Connector A as shown.

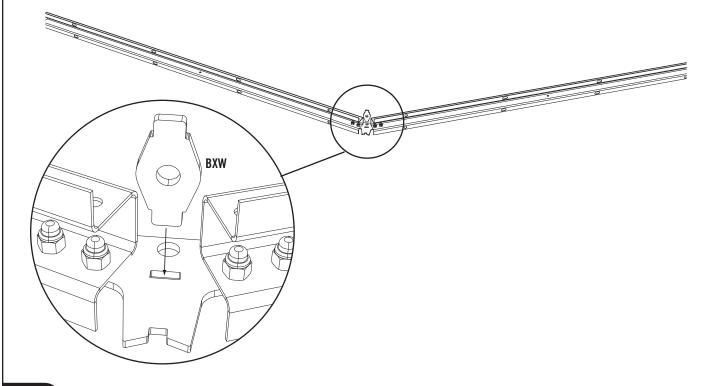

SEC 3.4


Place Truss Connector B (BXV) over the Truss Connector Bracket and the Truss Gutter Channels as shown. Insert four (4) #10 x 3/8" Pan-Head Screws (ADY) through a Truss Connector B as shown and lightly secure the Screws with four (4) #10 Cap Nuts (ADK). Hand tighten only in this step.

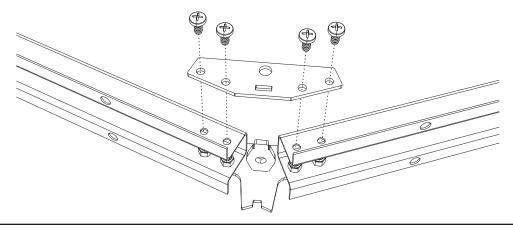

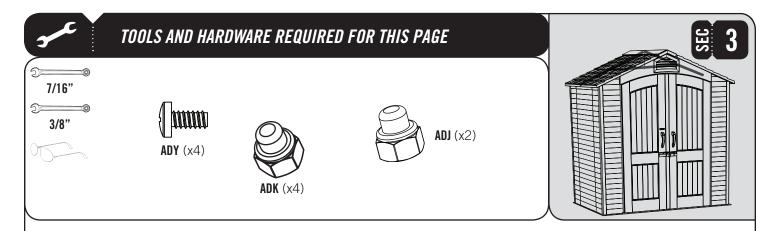


SEC 3.5


With the Truss Assembly on its side, align the holes in a **Truss Brace (AFG)** with those in the Truss Gutter Channels as shown. Secure with four (4) #10 x 3/8" Pan-Head Screws (ADY) and four (4) #10 Cap Nuts (ADK). Hand tighten only in this step.





SEC 3.6

With the Truss Assembly on its side, slide a **1/4" Threaded Rod (ADH)** through the Truss Brace and Truss Connector Bracket as shown. Secure the top and bottom of the 1/4" Threaded Rod with a **1/4" Cap Nut (ADJ)**. **Tighten securely.** Finally tighten all hardware. Set aside.

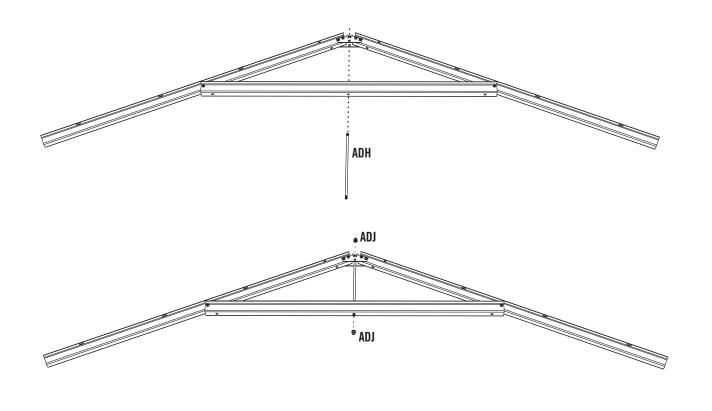

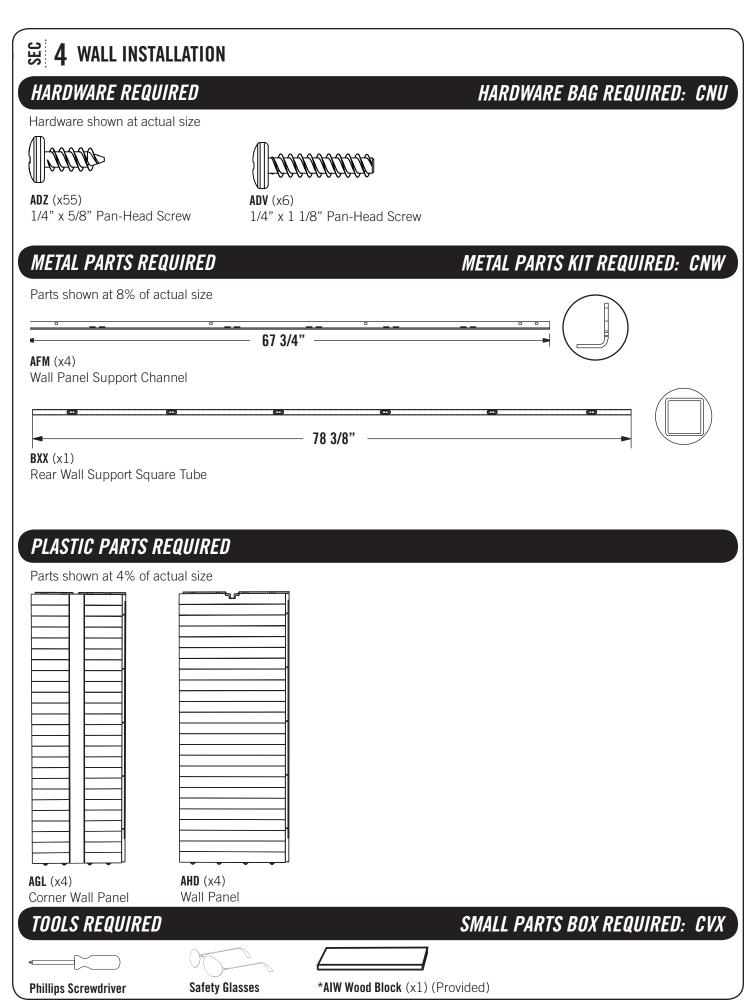

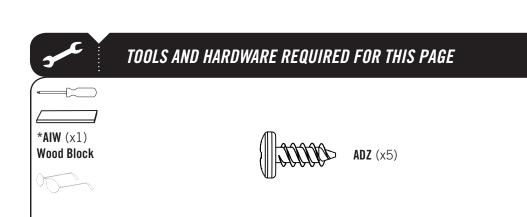




SEC 4.1


WALL PANEL INSTALLATION

Insert the tabs at the bottom of a **Corner Wall Panel (AGL)** into the holes in the slots on the front of the right, front corner of the Floor as shown. Slide the Panel to the right. Fold the Corner Wall Panel and snap the tabs at the bottom of the Panel down into the two slots along the right border of the Floor. If necessary, place the **Wood Block (AIW)** underneath the Floor, directly below the tab to be inserted, when snapping the tabs in place.

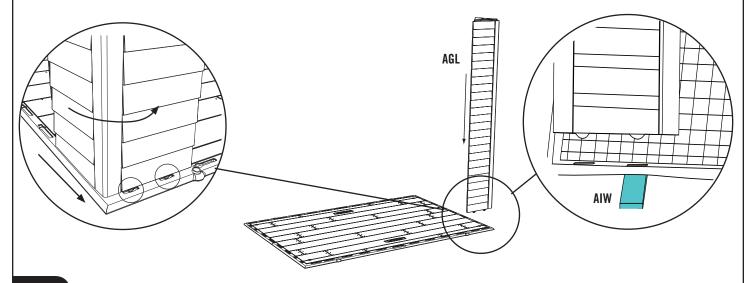


SEC 4.2

Insert a **Wall Panel (AHD)** into the holes in the slots along the right side of the shed, and slide the Panel toward the Corner Wall Panel. Ensure the top of the Panel is even with the Corner Wall Panel and the holes align. Insert **1/4"** x 5/8" **Pan-Head Screws (ADZ)** through the holes to fasten the Panels together as shown. **Do not overtighten.**



Note: A second person should apply pressure on the opposite side of the Wall Panels for easier insertion of the Screw. Do not overtighten Screw.








*AIW (x1) Wood Block






SEC

4.3


Slide and snap another **Corner Wall Panel (AGL)** into place in the same manner as you did earlier. Fasten with the required hardware. If necessary, place the **Wood Block (AIW)** underneath the Floor, directly below the tab to be inserted, when snapping the tabs in place.



SEC

4.4

One at a time, insert two **Wall Panels (AHD)** along the rear border of the Floor. Ensure the tops are level and the holes line up before fastening the Panels together with the required hardware.







*AIW (x1) Wood Block




ADZ (x10)



SEC 4.5

Fold a **Corner Wall Panel (AGL)**. Slide and snap it into place in the same manner as you did earlier. Fasten with the required hardware. If necessary, place the **Wood Block (AIW)** underneath the Floor, directly below the tab to be inserted, when snapping the tabs in place.







SEC

4.6


Snap a **Wall Panel (AHD)** into place along the right side of the shed. Ensure the top of the Wall Panel is even with the Corner Wall Panel and the holes align. Insert 1/4" x 5/8" **Pan-Head Screws (ADZ)** through the holes of the Wall Panels to fasten them together. **Do not overtighten.**




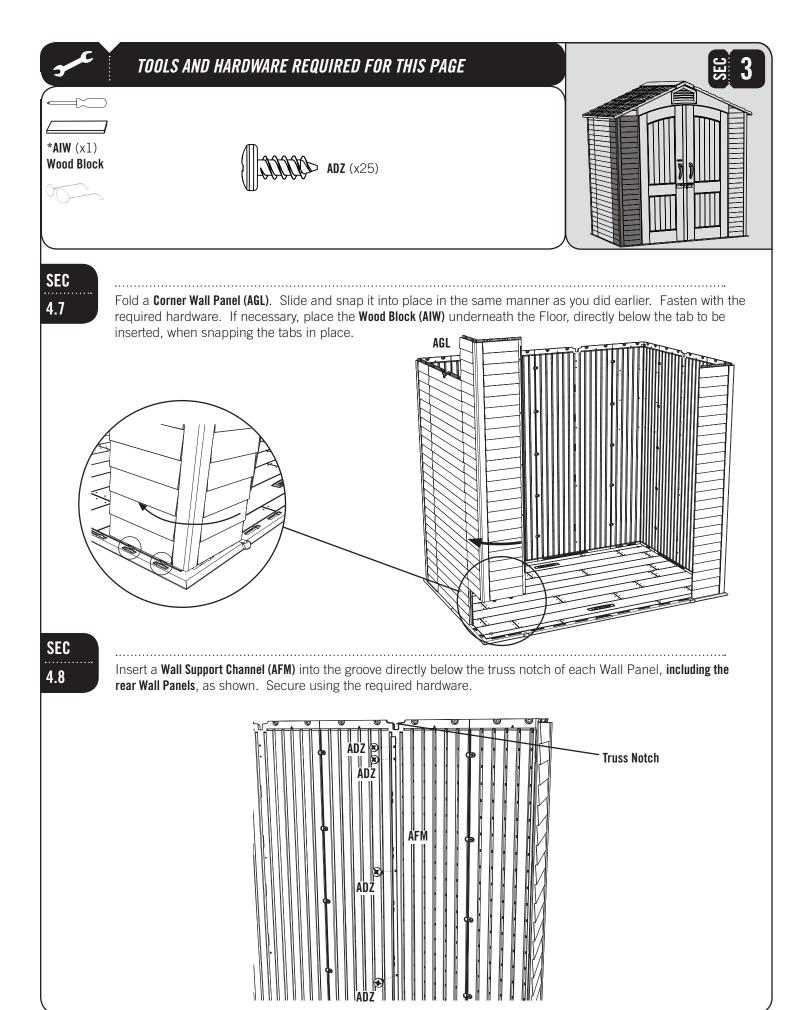










SEC 4.9

Align the holes in the **Rear Wall Support Square Tube (BXX)** with the screw bosses along the top of the rear Wall Panels as shown. Secure the Rear Wall Support Tube to the Wall Panels using six (6) 1/4" x 1 1/8" **Pan-Head Screws (ADV)**. **Tighten securely, but do not overtighten.**

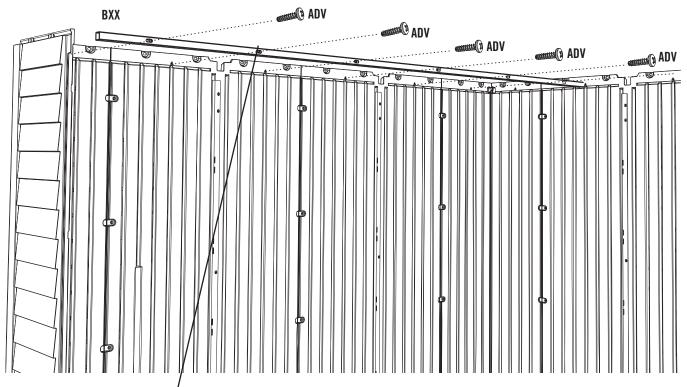



The indented, rectangular holes face the Wall Panels.

HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BYJ

Hardware shown at actual size






ADW (x5)

#10 x 3/4" Pan-Head Screw

BYZ (x2)

#10 x 1 3/4" Pan-Head Screw



BBH (x1)

1" Square End Cap



AEE (x7)

#10 Flat Washer



CHK(x1)

#10 x 3/4" Self-Drilling/Self-Tapping Screw



ARA (x1)


1/8" Drill Bit



BZB (x4)

#10 x 1/4" Nylon Spacer

Parts shown at 25% of actual size



BYQ(x2)

Deadbolt Latch



BYP (x2

Deadbolt Latch Bracket



BYS (x1)

Outer Door Handle



BYR (x1)

Inner Door Handle

METAL PARTS REQUIRED

METAL PARTS KIT REQUIRED: CNW

Part shown at 8% of actual size

77"

Door Hinge Tube

CHI (x1)


Door Square Tube

75"

월 5 LEFT DOOR ASSEMBLY (CONT.)

PLASTIC PARTS REQUIRED

Part shown at 4% of actual size



AGO(x1)Left Door

TOOLS REQUIRED HARDWARE BAG REQUIRED: BYJ **Phillips** Plain 7/16" 3/8" Electric Drill Rubber Mallet **1/8" Drill Bit (ARA)** (x1) **Safety Glasses** Screwdriver Screwdriver Wrench Wrench (Included)